


Cube Series

One of the most powerful and flexible indoor LED display

Cube Series is a lightweight & wallmount fine pitch product, which will revolutionize the indoor LED experience.

Cube Series is strong and its chassis has been tested to a remarkable 1300kg breaking point, so hanging 13m without additional bracket is its safe and max extent.

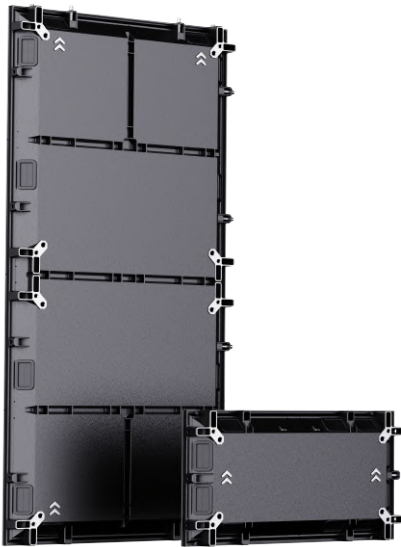

Converts To Three Different Panel Sizes



250 x 250mm



500 x 500mm



500 x 750mm

POWERFUL COMPATIBILITY

One chassis with same internal composition for all available pitches.

Superb stock preparation efficiency.


HANGING 13M HIGH without additional bracket

The chassis has been tested to an 1300kg breaking point.

LIGHT & THIN

44mm
 THICKNESS

19.5kg
 PER M²

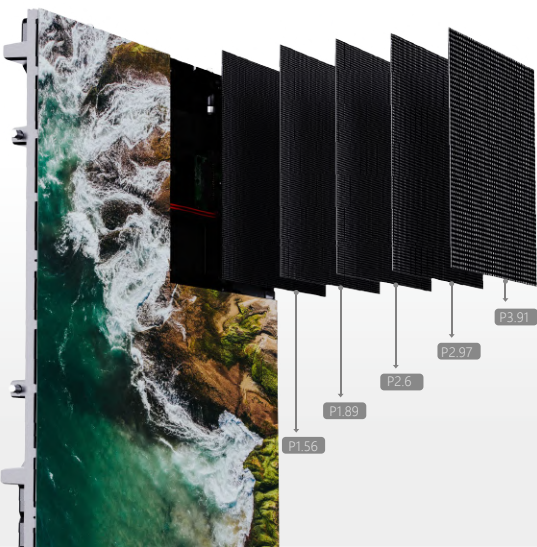

P1.56
 P1.89
 P2.6
 P2.97
 P3.91






EASY MAINTENANCE

Full front maintenance design.

EASY ASSEMBLY

- UP AND DOWN CAPTIVE BOLT
- LEFT AND RIGHT CAPTIVE BOLT

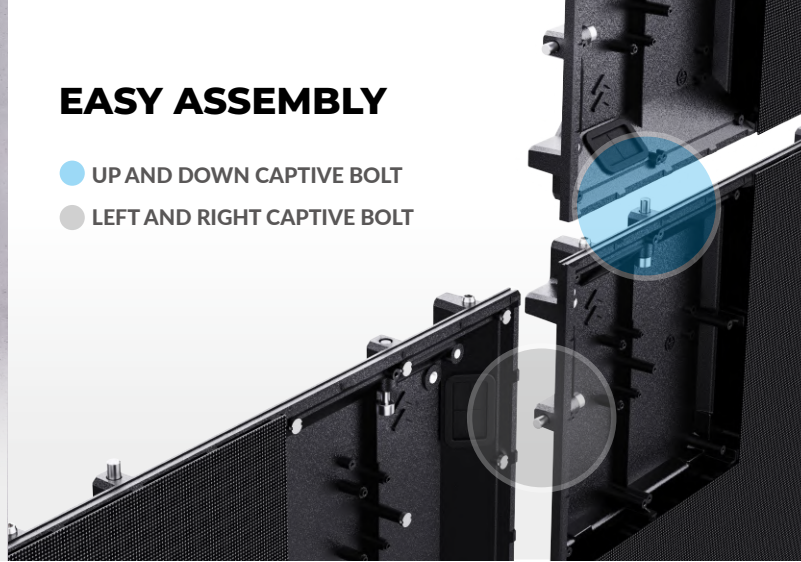


CREATIVE INSTALLATION



**BRACKET FREE
DIRECT WALLMOUNT**



**COMMON BRACKET
INSTALLATION**

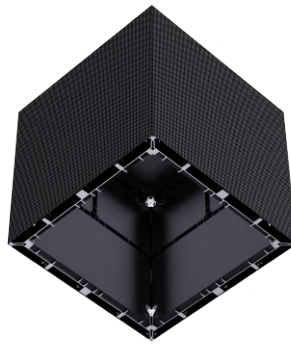

**90° & CUBIC
(Min: 500x500x500mm)**



CONCAVE & CONVEX

SPECIFICATIONS

Model	U5A-15VA	U5A-18VA	U5A-25VA	U5A-26VA	U5A-29VA	U5A-39VA
Pixel Pitch(mm)	P1.5625	P1.8939	P2.5	P2.604	P2.97	P3.91
LED Configuration	SMD1212	SMD1515	SMD2020	SMD1515/2020	SMD2020	SMD2020
Pixel Density(pixels/m ²)	409600	278784	160000	147456	112896	65536
Brightness(cd/m ²)	600	600~800	800~1000	800~1000	800~1000	800~1000
Module Size(W x H mm)	250 x 250	250 x 250	250 x 250	250 x 250	250 x 250	250 x 250
Module Resolution(dots)	160 x 160	132 x 132	100 x 100	96 x 96	84 x 84	64 x 64
Panel Size(W x H x D mm)	500 x 1000 x 44, 500 x 250 x 44					
Panel Weight(kg/m ²)	19.5					
Power Consumption Max/Avg.(W/m ²)	600 /200	600 /200	600 /200	600 /200	600 /200	600 /200
Refresh Rate(Hz)	3840	3840	3840	3840	3840	3840
Viewing Angle(H./V.)	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°
Contrast Ratio	5000:1	5000:1	4000:1	4000:1	4000:1	4000:1
Gray Scale(bit)	≤14	≤14	≤14	≤14	≤14	≤14