



108"/135"/163"/216

IRIS-S COB ALL-IN-ONE

Efficient Collaboration
Smart Office

Screen Mirroring | Interactive Meeting | Touch Control | COB Panel



Superior picture quality, superb color performance

The all-in-one display employs flip-chip COB technology, saving energy while being gentle on the eyes. With DCI-P3 wide color gamut and 1,000,000:1 contrast ratio, it delivers seamless colour transitions and reproduces every detail.

DCI-P3 Color Gamut **1,000,000 : 1** Contrast Ratio

All-in-one design, one display meets all needs

Built-in Android 11.0 system

Octa-core processor

Equipped with various input and output ports

Dual-channel surround sound

External cameras, microphones and other devices can be connected

Dual Operating System (optional)

Windows/Android free switch



FHD **UHD** **16:9**

UHD large size, immersive conference experience

Available in various size options: 108", 135", 163", 216"



High-precision touch control, inspiration at your fingertips

Supports touch control (compatible with dual systems) using highly precise infrared touch technology. Touch accuracy of $\pm 2\text{mm}$ ensures flexible and accurate interactive operations, enabling natural and smooth writing for more convenient and efficient meetings.

Versatile screen mirroring, built-in professional meeting software

- Supports wireless screen mirroring for multiple platforms such as Windows, Mac OS, iOS, and Android, displaying up to four screens simultaneously.
- Comes with a meeting whiteboard, video conference and other software, and users can install additional apps as needed.





Multiple display modes, adaptive for all scenarios

Tailored for different meeting environments, offering Standard, Soft, Cinema, and Video modes for optimal display in any setting.

Flexible installation, easy maintenance

- Support wall mounting and mobile stand-mounting.
- Full front maintenance design allows for convenient installation and service.

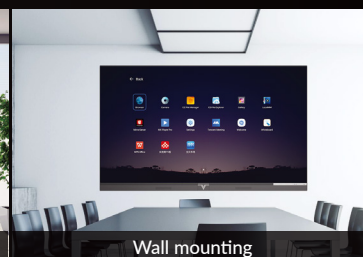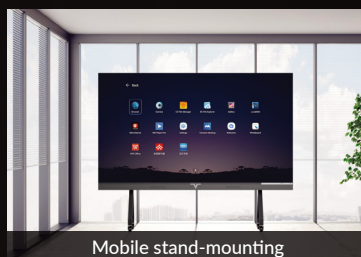

SPECIFICATIONS

Model	S108COBVT-FSN SR108COBVT-FSN	S135COBVT-FSN SR135COBVT-FSN	S135COBVT-USN SR135COBVT-USN	S163COBVT-FSN SR163COBVT-FSN	S163COBVT-USN SR163COBVT-USN	S216COBVT-USN
Display Size	108"	135"	135"	163"	163"	216"
Resolution	1920*1080	1920*1080	3840*2160	1920*1080	3840*2160	3840*2160
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9
Touch Control	Infrared touch(Optional)	Infrared touch(Optional)	Infrared touch(Optional)	Infrared touch(Optional)	Infrared touch(Optional)	No
Overall Dimensions (W x H x Dmm)	2425 x 1487 x 45 Bottom Thickness 59.5	3025 x 1825 x 45 Bottom Thickness 59.5	3025 x 1825 x 45 Bottom Thickness 59.5	3625 x 2162 x 45 Bottom Thickness 59.5	3625 x 2162 x 45 Bottom Thickness 59.5	4825 x 2837 x 45 Bottom Thickness 59.5
Actual Screen Dimensions(W x Hmm)	2400 x 1350	3000 x 1687.5	3000 x 1687.5	3600 x 2025	3600 x 2025	4800 x 2700
Installation Method	Mobile Stand / Wall Mounting					Wall Mounting
Refresh Rate(Hz)	3840					
Brightness(nits)	600					
Gray Scale(Bit)	22					
Contrast Ratio	1,000,000 : 1					
Viewing Angle(H./V.)	160° / 160°					
Maintenance Method	Front					
Operating System	Android 11.0, 8+128G					
Working Voltage	AC: 100V - 240V, 50/60 Hz					
Power Consumption Max(W)	1200	1850	2580	2450	2750	4600
Power Consumption Avg.(W)	400	620	860	820	920	1550
Storage Temp.(°C)	-20 ~ 60					
Operating Temp.(°C)	-10 ~ 50					
Storage Humidity (%RH)	10 ~ 90					
Operating Humidity (%RH)	10 ~ 80					