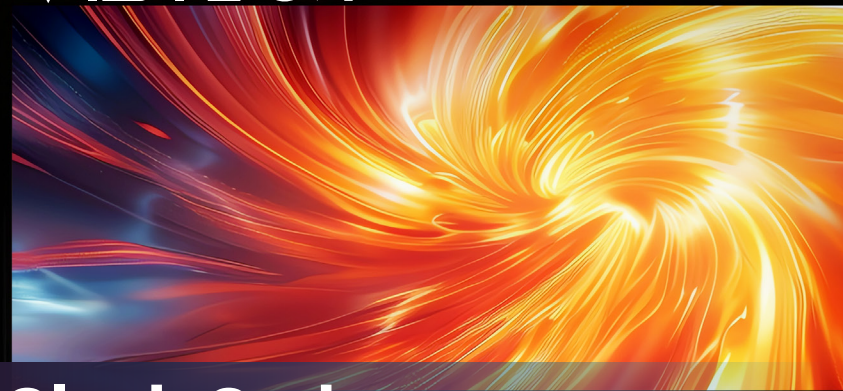


# Sleek Series

## Ultra-Slim MicroLED

### Minimalist & Ultra-Slim Design

**20mm**  
Ultra-Slim

**3.6kg**  
Ultra-Light



### 16:9 Standard Ratio

Standard 16:9 ratio for flexible FHD, 4K UHD, and 8K display.



### Full Flip-Chip COB for Stunning Visuals

Wide color gamut, high contrast, and excellent black-level uniformity for superior image quality.

### Low Power Consumption, High Energy Efficiency

Low-power design reduces energy consumption for greater efficiency.

### IP64 Front Protection, Built to Last

IP64 front protection against water, dust, and impact.



**DCI-P3**  
Wide Color Gamut

**20,000:1**  
High Contrast Ratio



## Hard Connection Design, Stable & Durable

The modules feature a hard connection to the cabinet for enhanced stability.



## 3-Axis, 6-Direction Adjustment for Seamless Display

The modules support 3-axis, 6-direction adjustment, delivering superior flatness for smooth, seamless displays.

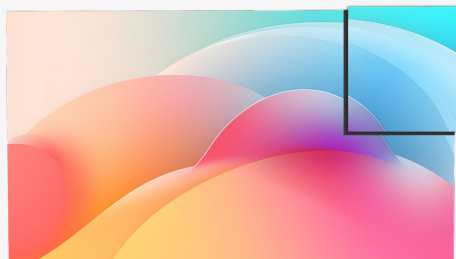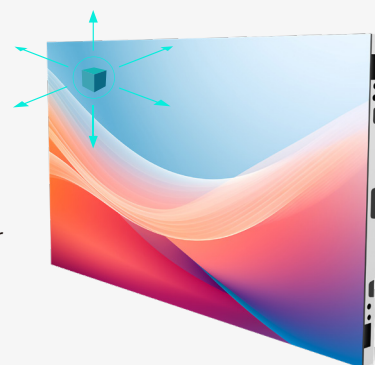

## Full Front Maintenance, Easier Service

Full front maintenance for flexible installation and easy servicing.

## SPECIFICATIONS

| Model                                        | C63-09VSA (5)        | C63-12VSA (5) | C63-15VSA (5) |
|----------------------------------------------|----------------------|---------------|---------------|
| Pixel Pitch(mm)                              | 0.9375               | 1.25          | 1.5625        |
| Panel Dimensions(WxHxD)(mm)                  | 600 x 337.5 x 20     |               |               |
| Module Size(WxH)(mm)                         | 150 x 168.75         |               |               |
| Resolution                                   | 640*360              | 480*270       | 384*216       |
| Panel Technology                             | COB                  |               |               |
| Brightness(nits)                             | 600                  | 600           | 600           |
| Contrast Ratio                               | 20,000:1             |               |               |
| Color Temperature(K)                         | 3000-10000           |               |               |
| Viewing Angle(H./V.)                         | 170°/170°            |               |               |
| Frame Frequency(Hz)                          | 60                   |               |               |
| Refresh Rate(Hz)                             | 3840                 |               |               |
| Working Voltage                              | AC:100~240V, 50/60Hz |               |               |
| Peak Power Consumption(W/m <sup>2</sup> )    | ≤350                 | ≤285          | ≤300          |
| Average Power Consumption(W/m <sup>2</sup> ) | ≤120                 | ≤95           | ≤100          |
| Lifetime(Hours)                              | 100000               |               |               |
| Operating Temp(°C)                           | -10 ~ 50             |               |               |
| Humidity Range(%RH)                          | 10 ~ 80              |               |               |
| Cabinet Weight (kg)                          | 3.6                  |               |               |